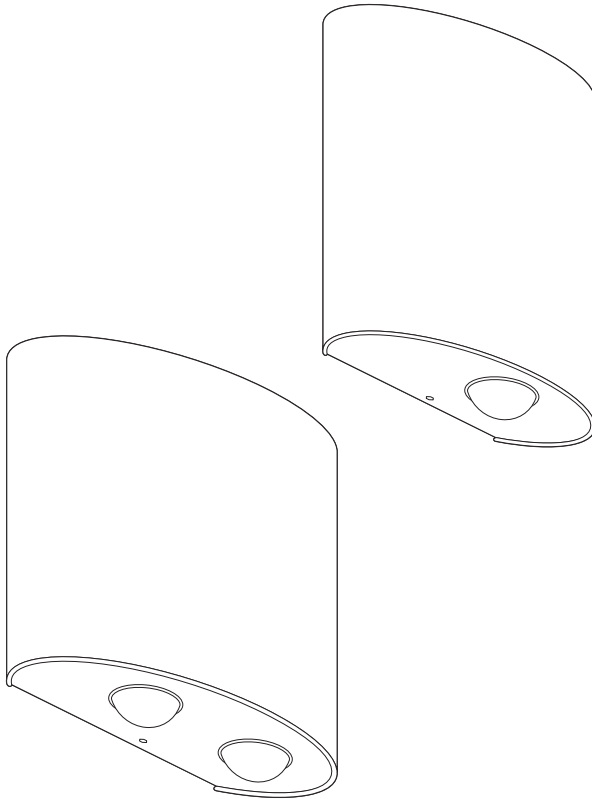
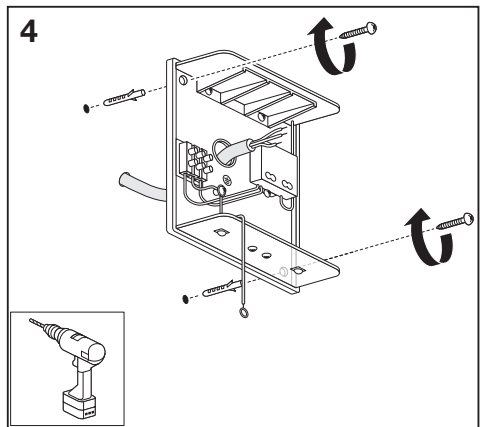
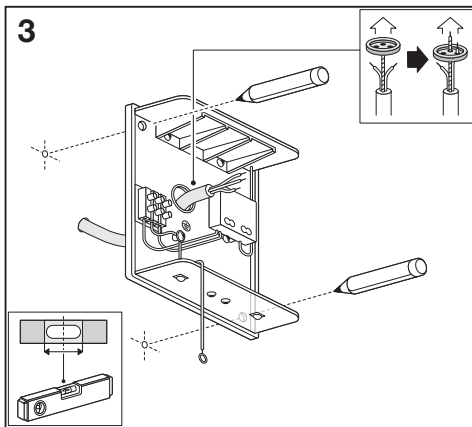
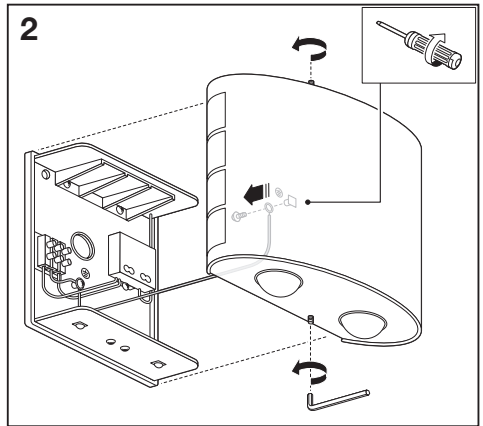
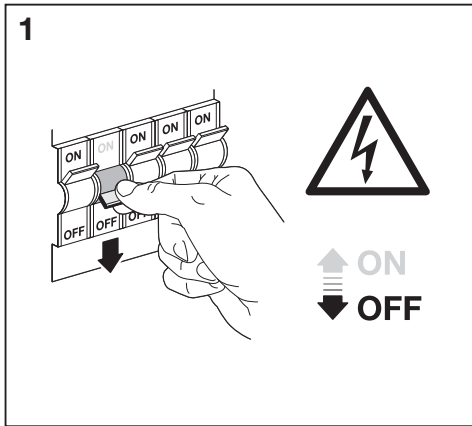
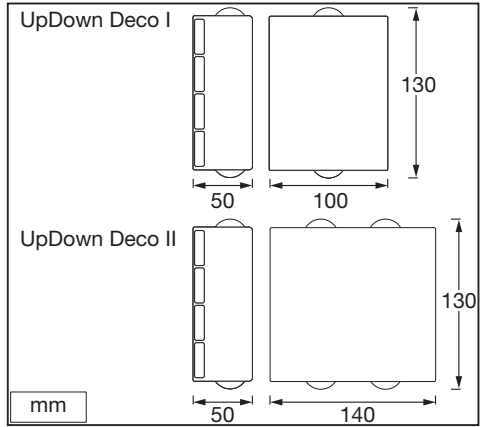
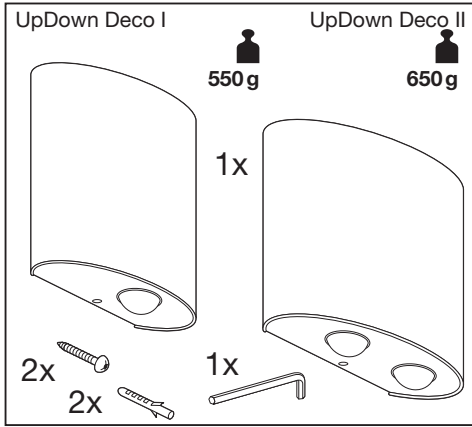
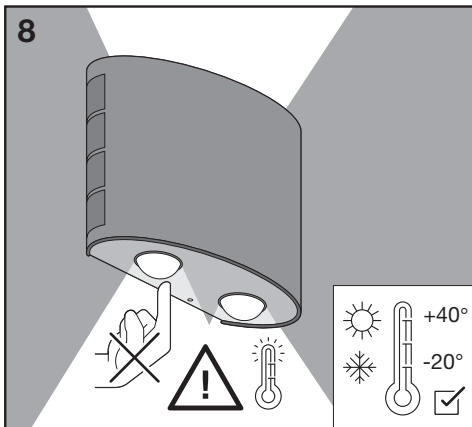
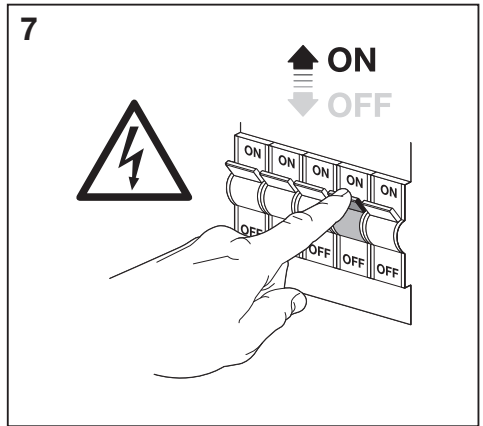
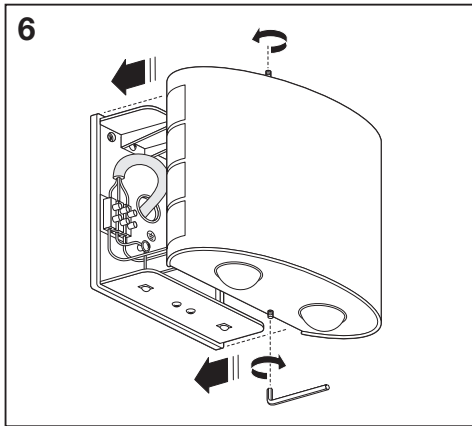
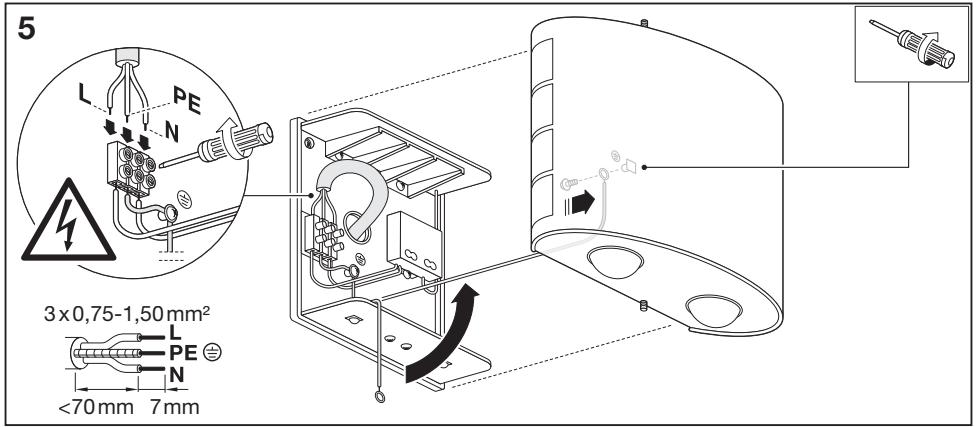


**ENDURA® STYLE
UPDOWN DECO**



	EAN	W	lm	K	Temp. (°C)	V~	mA	Hz	PF
ENDURA® STYLE UpDown Deco I 6W DG	4058075205529	6	280	3000	-20...+40	220-240	65	50/60	>0.5
ENDURA® STYLE UpDown Deco II 11W DG	4058075205543	11	550	3000	-20...+40	220-240	95	50/60	>0.5







LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com