


Ultra V Pro

HALF-CELL N-TYPE TOPCon
BIFACIAL DOUBLE-GLASS MODULE
TYPE: STPXXXS-I54-Nsh+



435-455W **22.8%**
POWER OUTPUT MAX EFFICIENCY

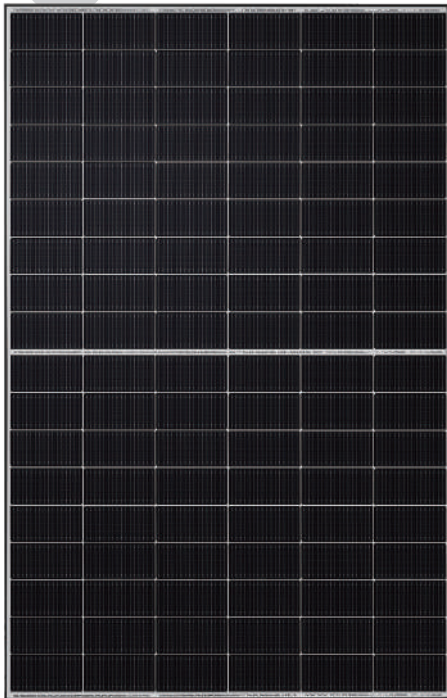

High module conversion efficiency
Module efficiency up to **22.8%** achieved through advanced cell technology and manufacturing process



Multi busbar technology
Superior optical utilization and current collection capability, effectively improving product power and reliability



Excellent low light performance
More power output in low light conditions such as cloudy days, mornings and evenings



Superior load-bearing capability
Module certified to withstand **5400 Pa** front side max static test load and **2400 Pa** rear side max static test load *




ISO 14001 Environment Management System
ISO 45001 Occupational Health and Safety
ISO 9001 Quality Management System
SA 8000 Social Responsibility Standards
IEC TS 62941 Guideline for Module Design

IEC 61701 Salt-mist certification
IEC 62716 Ammonia certification
IEC 60068-2-68 Dust and Sand
IEC 61730-2 (UL790) Fire class C



30 years of linear warranty
25 years of product warranty

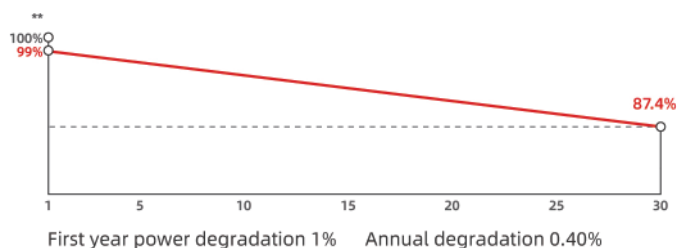

* Please refer to Suntech Standard Module Installation Manual for details.

** Please refer to Suntech Limited Warranty for details.

*** WEEE only for EU market.

**** Suntech reserves the right to the final.

