

EVEREADY 996 4R25

6V


Lantern



General Information

Classification:	Carbon Zinc
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO_2) No added mercury or cadmium
Designation:	ANSI-908A IEC- 4R25
Nominal Voltage:	6.0 volts
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	600 grams
Typical Volume:	492 cubic centimeters
Shelf Life	3 years at 21C
Terminal:	Coil Spring


Industry Standard Dimensions

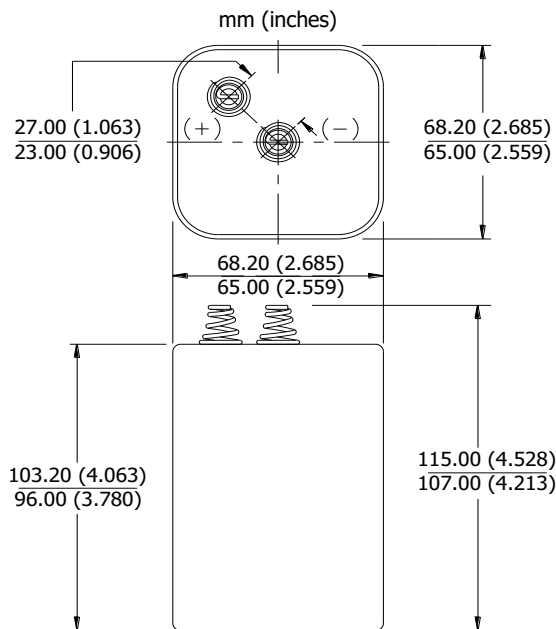

This battery shall pass freely through a cylindrical tube 82.6 diameter x 101.6 long.

Milliamp-Hours Capacity

Continuous discharge to 3.2 volts at 21°C

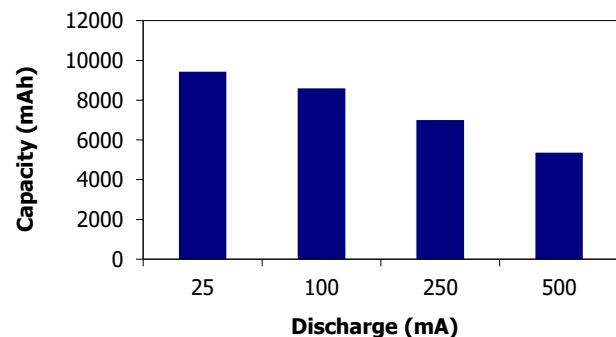


Industry Standard Tests (21°C)

STEADY BURN BARRICADE 110 ohm 12 hrs/day



LIGHTING 9.1 ohm 30 min/hour 8 hrs/day

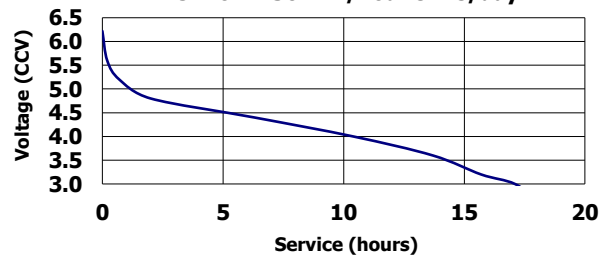

LIGHTING 33 ohm 30 min/hour 8 hrs/day



Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

Contents herein do not constitute a warranty and are for reference only.