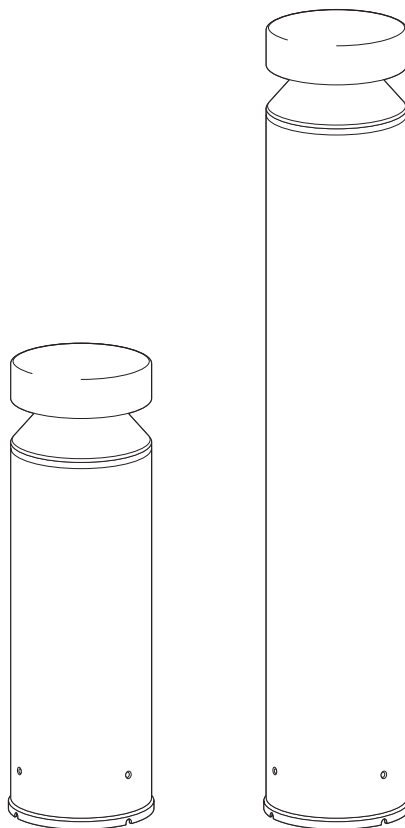

ENDURA® STYLE CYLINDER



	EAN	W	lm	K	°C	V~	mA	Hz	PF
ENDURA® STYLE CYLINDER 50 CM 6W ST	4058075205376	6	360	3000	-20...+40	220-240	50	50/60	>0.5
ENDURA® STYLE CYLINDER 80 CM 6W ST	4058075205390	6	360	3000	-20...+40	220-240	50	50/60	>0.5

