


DBY-22321NP | WIRELESS DOORBELL SET


NEEDED TO START (EXCL.)




Optional




BOX CONTENT | INHALT | CONTENUS | INHOUD DOOS | CONTENUTO | CONTENIDO DE LA CAJA

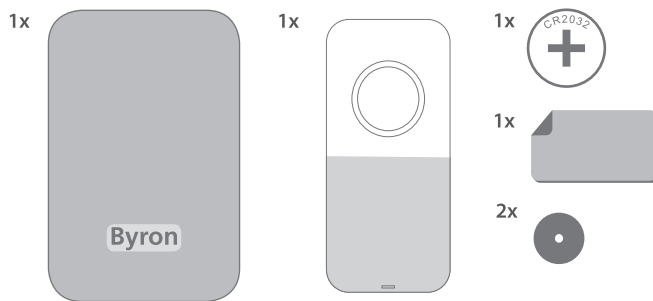


FIRST SET-UP | ERSTEINRICHTUNG | PREMIÈRE CONFIGURATION | EERSTE INSTALLATIE | PRIMO SET-UP | PRIMERA CONFIGURACIÓN

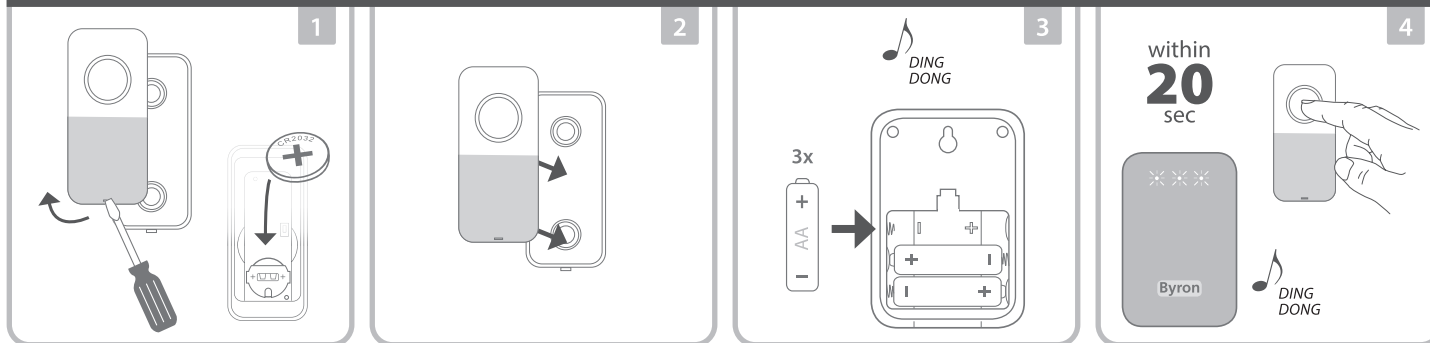


INSTALLATION | INSTALLATIE | INSTALLATION | INSTALLATION | INSTALACJA | INSTALACE | INSTALLAZIONE | INSTALACIA | INSTALACIÓN

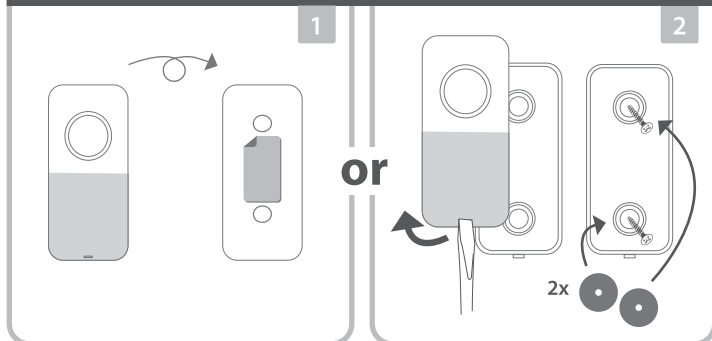


PAIRING MULTIPLE CHIMES | KOPPELEN MEHRERER KLINGELN | JUMELAGE DE PLUSIEURS CARILLONS | MEERDERE DEURBELLEN KOPPELEN | ACCOPPIAMENTO MULTIPLO | EMPAREJANDO MÚLTIPLES TIMBRES

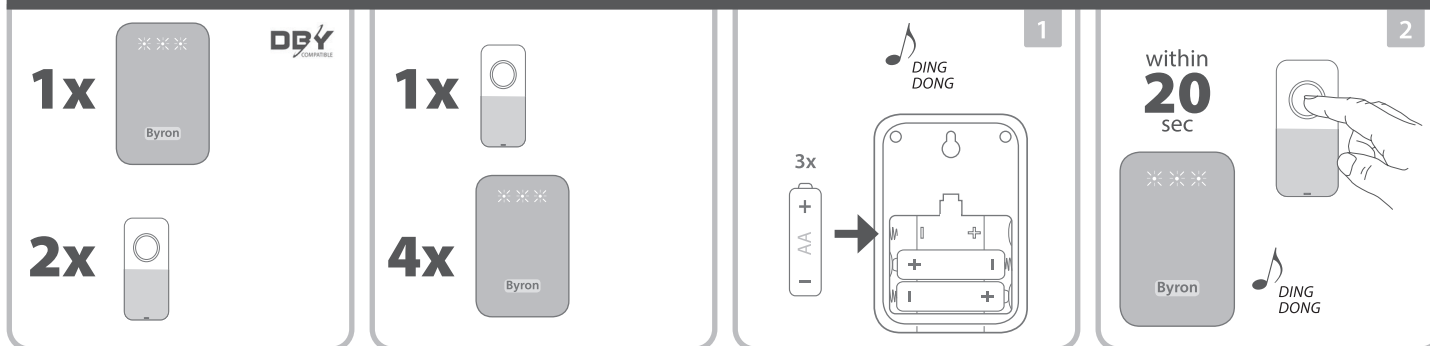


FEATURES | EIGENSCHAFEN | CARACTÉRISTIQUES | KENMERKEN | CARATTERISTICHE | CARACTERÍSTICAS

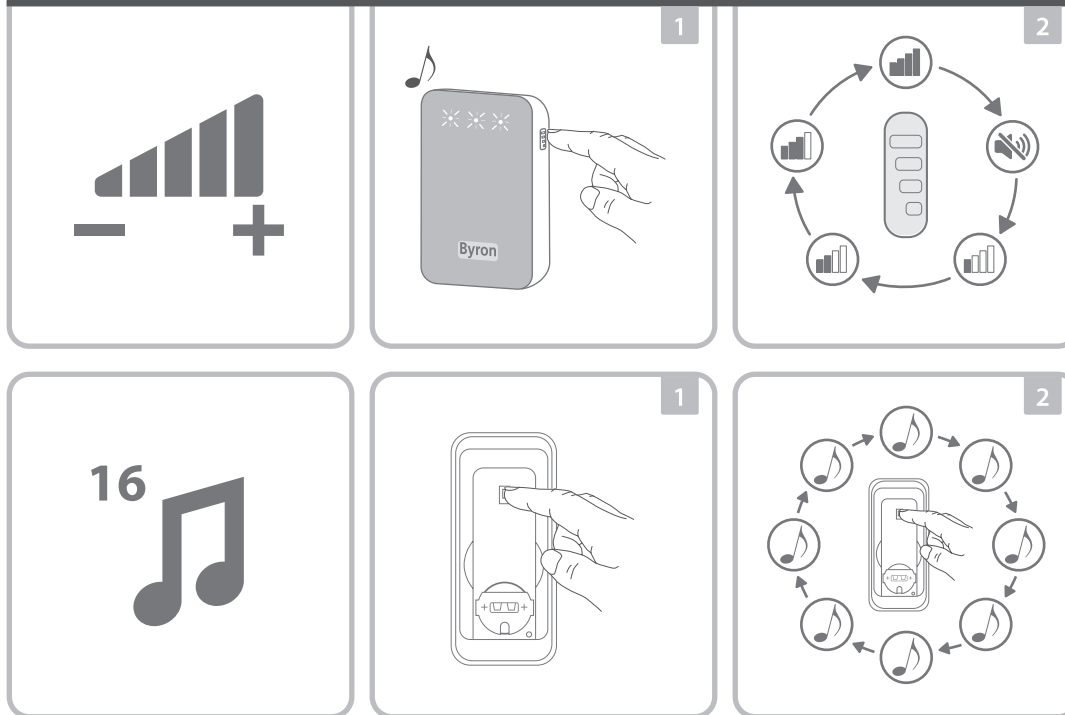

TROUBLESHOOTING | FEHLERBEHEBUNG | RÉOLUTION DE PROBLÈMES | PROBLEMEN OPLOSSEN | RISOLUZIONE DEI PROBLEMI | SOLUCIÓN DE PROBLEMAS

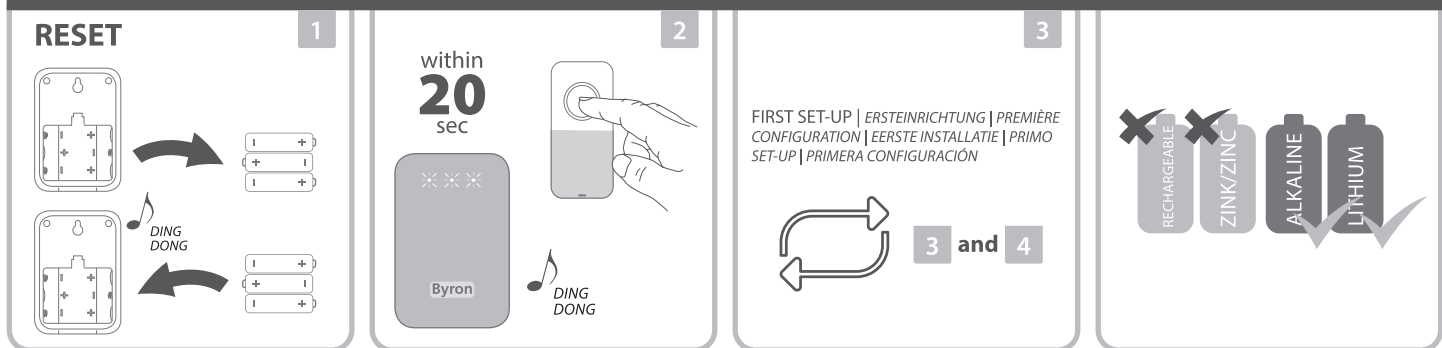

WWW.CHBYRON.EU



Find us on



Or contact us directly:

EU address:	UK address:
smartwares Europe	smartwares Safety and Lighting Ltd.
Jules Verneweg 87 5015 BH Tilburg The Netherlands www.chbyron.eu	Meriden House, 6 Great Cornbow Halesowen, West Midlands, B63 3AB United Kingdom



Conforms
to all relevant
European Directives.

Frequency band: 433.92MHz (433.050 - 434.790 MHz)
Maximum radio-frequency power: +5.92dB
Range: 150 meters

Wireless Doorbell DBY-22321NP
Power: 3 x 'AA'/LR6 1.5V: Total 4.5V
Indoor Use Only

Push button - DBY-23710
Power supply: 1 x CR2032 3V
IP44 Weather Resistant

